


# BBS182 MINIATURE CAPSULE SLIP RINGS

## OD 12.5

BBS182 slip rings are small and compact with OD 12.5mm \* L 18.2mm, standard, off-the-shelf. Color-coded lead wires are used on both the stator and rotor for simplified electrical connections. Using a 90° V-groove ring design for each ring.

BBS1829 is the high-end version corresponding to BBS182, It has higher performance and longer working life, higher speed rotating speed, low noise.

## Product images

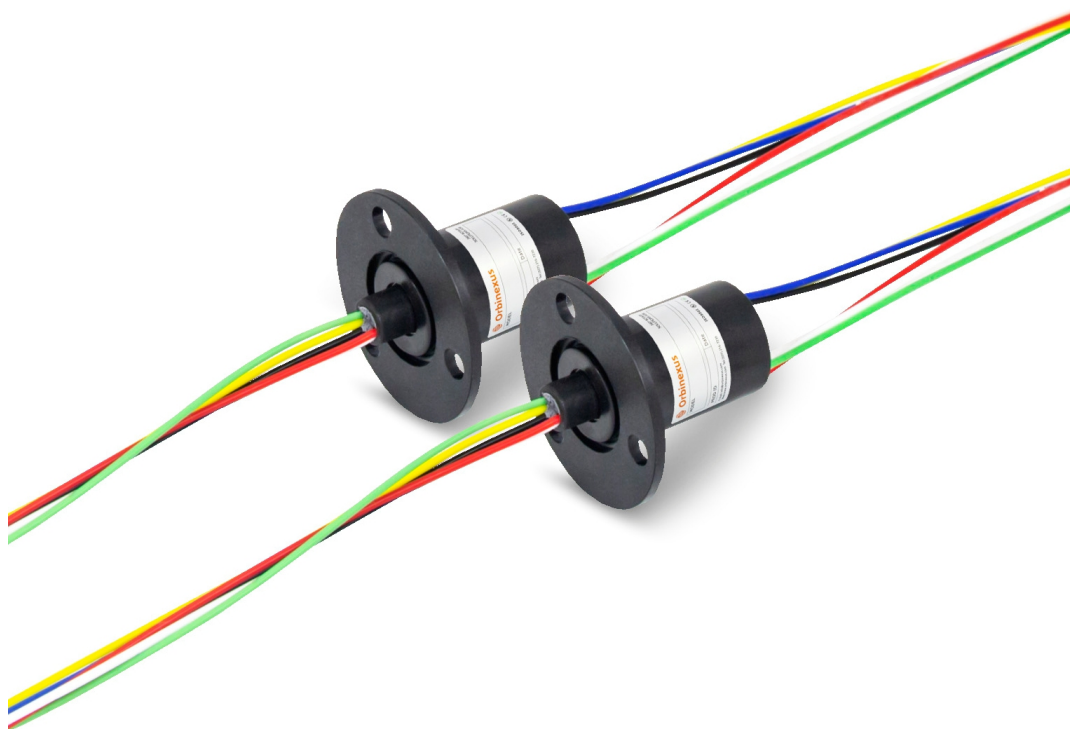

The pictures are for reference only

As the signal pathway increases or the combination of light and electricity results in changes in the appearance and size of the product, the actual product shall prevail.

## Part# Explanation

**BBS 182(9) - FL01**


BBS:miniature capsule slip ring

182:common quality version  
1829:high-end quality version


FL01: flange type

## Dimensions


BBS182 Standard Model

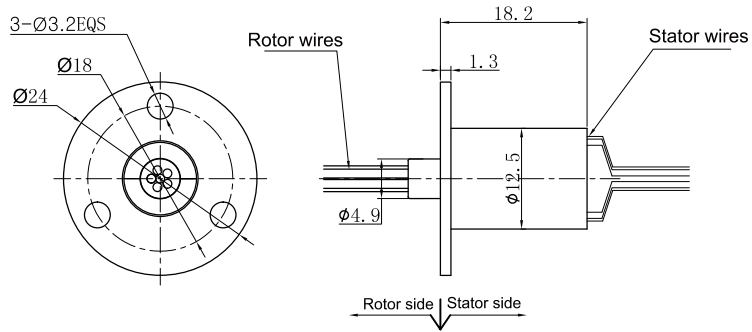


BBS182 - FL00

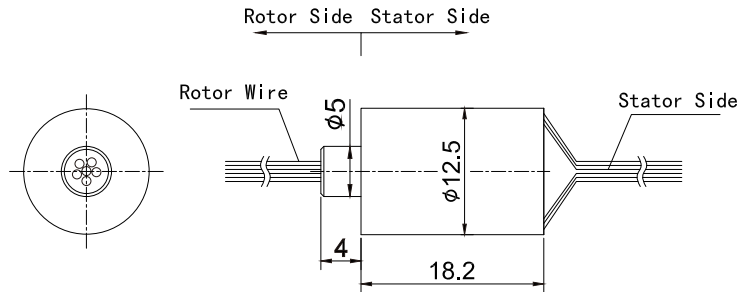


BBS182 - FI01

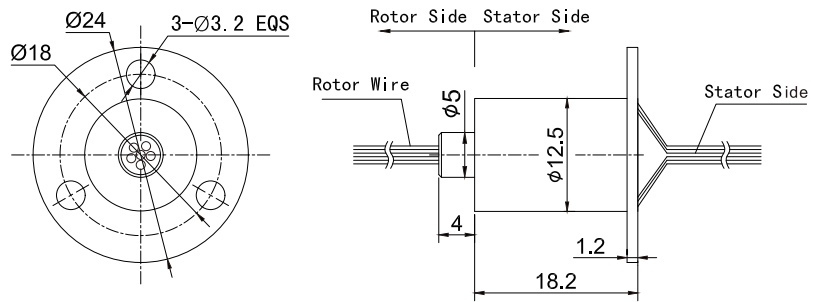


BBS182 - FI02

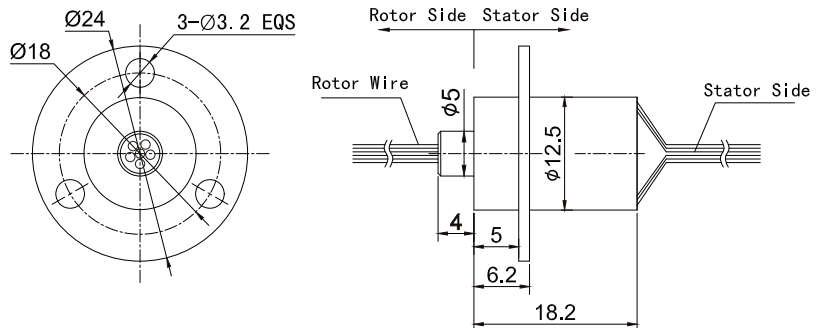


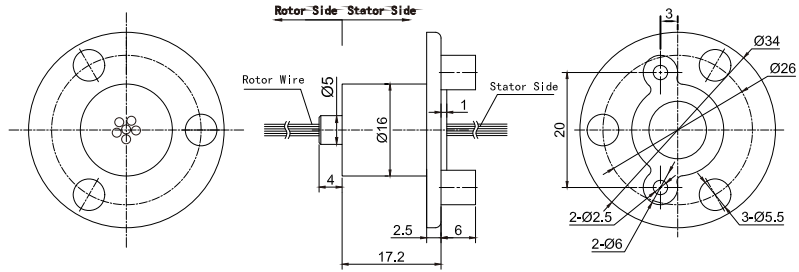

BBS182 - FI04

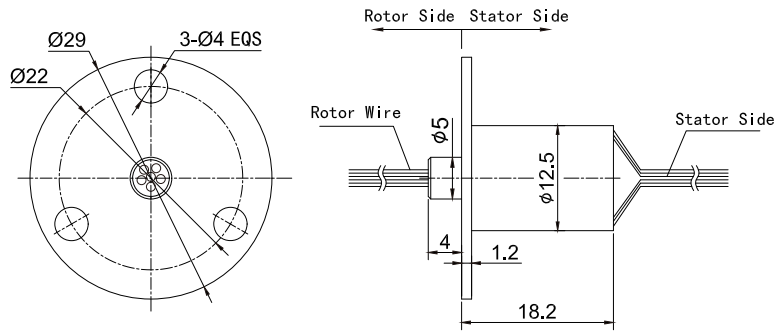

BBS182 - FI05

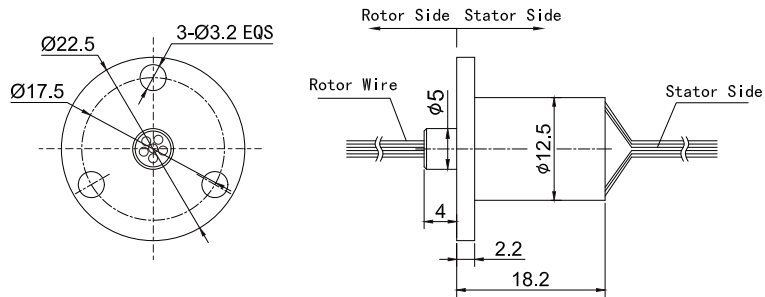

## Electrical Data

Parameter	Power Value	Signal Value
Rated Voltage	0~240VAC/VDC	0~240VAC/VDC
Insulation Resistance	≥100MΩ/500VDC	≥100MΩ/500VDC
Lead Wires	AWG#28 teflon	AWG#28 teflon
Lead Length	Standard 300mm(adjustable)	
Electrical Noise	<0.01Ω	

## Mechanical Data

Parameter	Value
Working Life	See Product Quality Level Table
Rotating Speed	See Product Quality Level Table
Working Temperature	-30°C~80°C
Operating Humidity	0~85% RH
Contact Material	See Product Quality Level Table
Housing Material	See Product Quality Level Table
Torque	0.005N.m; +0.02N.m/6rings
Protection Grade	IP51

## Product Quality Level Table

Part#	Max Speed	Working Life	Housing Material	Electrical Noise①@10RPM
BBS182	250RPM	> 10 million	Plastics	10mΩ
BBS1829	1000RPM	> 30 million	Plastics	4mΩ

## Lead Wires Color Code

Ring	1	2	3	4	5	6
Color	BLK	RED	YEL	GRN	BLU	WHT

## Options for custom slip ring

- BBS1829 is the high-end version corresponding to BBS182.
- Optional flange mounting.
- Specified connectors and Heat-shrink tube.
- Longer lead lengths available.
- High temperature is optional.
- Military Grade.