

BXJG-BSDI224

MILITARY INDUSTRYPOD SLIP RING SERIES

Electrical Specifications

Project	Power	Signal
Rated voltage	0~440VAC/VDC	0~440VAC/VDC
Insulation resistance	≥1000MΩ/500VDC	≥1000MΩ/500VDC
Dielectric strength	500VAC@50Hz,60s	
Dynamic resistance change value	<10mΩ	


Mechanical technical indicators

parameter	value	parameter	value
Number of rings	25 Ring	Working humidity	0~85% RH
Rated current	2A/24/ring, HD HD-SDI 1road	Contact material	precious metal
working life	200 Million revs	shell material	Aluminum alloy
Operating temperature	-40°C~80°C	Protection class	IP65

RF channel characteristics

HD-SDI	Frequency	Impedance	Insertion Loss	VSWR
1	0GHz≤f≤2.3GHz	75 ohms	≤0.65db	≤1.3

Product images

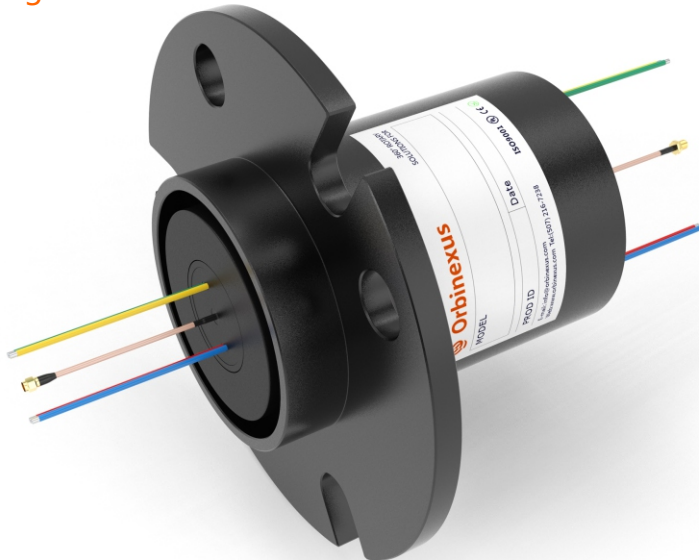

The pictures are for reference only

If there are changes in the appearance and size of the product, the actual product should prevail.